


■ 製品コード：RECOMSTACKA(xxHyyS)K

- 1) **A** (M4ボルト取付の選択) :
 - ・無表示=ストレートアダプター
 - ・**O**=直交アダプター
 - ・**P**=インライン直交
- 2) **xx** : スロット数 (スタックサンプルプレート数)
- 3) **yy** : 追加スペーサーの高さ (mm)
- 4) **K** : オプション
 - ・**L**=ラベル付
 - ・**H**=吊り下げアダプター

【製品コード】

- 1) RECOMSTACK(xxHyyS) : サンプルストレージスタック
- 2) RECOMSTACK(xxHyyS)L : ラベル付サンプルストレージスタック
- 3) RECOMSTACK(xxHyyS)_H : 逆サンプルストレージスタック
- 4) RECOMSTACKO(xxHyyS)_ : 直交ストレージスタック
- 5) RECOMSTACKP(xxHyyS)_ : インライン直交ストレージスタック
- 6) RECOMSTAGE(xxHyyS)N : ラベル付ストレージステージ

【ハウジング材料】 ステンレス鋼

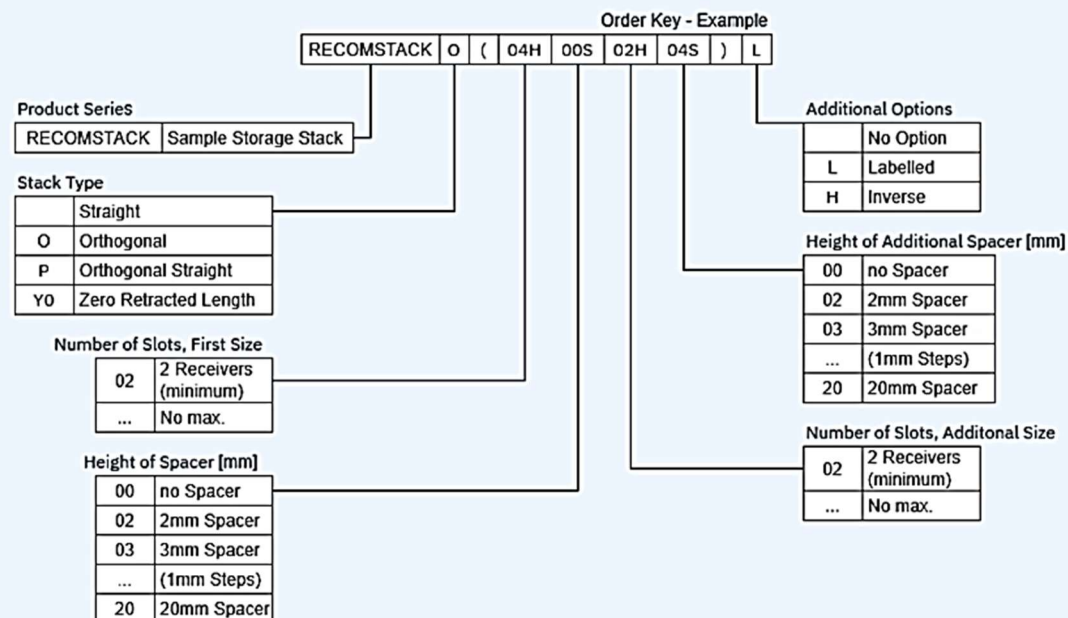


RECOMSTACK(xxHyyS)
アダプター：M4ボルト底部取付




RECOMSTACK(xxHyyS)L
アダプター：M4ボルト底部取付




RECOMSTACK(xxHyyS)_H
アダプター：M4ボルト上部取付




RECOMSTACKO(xxHyyS)_
アダプター：M4ボルト直交取付



RECOMSTACKP(xxHyyS)_
アダプター：M4ボルト直交取付



RECOMSTAGE(xxHyyS)N
アダプター：M4ネジ上部&下部取付

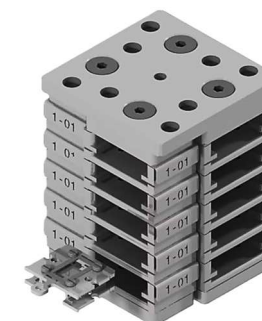

Standard RECOMSTACK

spacer 00 --> no spacer
number of units
first stack

number of units	second stack
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100


spacer 4 mm

additional options

additional options:
L: labeled
H: inverse mounted





Product: RECOMSTACK(04H 00S 02H 04S) L
RECOMSTACK on straight adapter labeled

Example: RECOMSTACK(03H00S02H04S)L

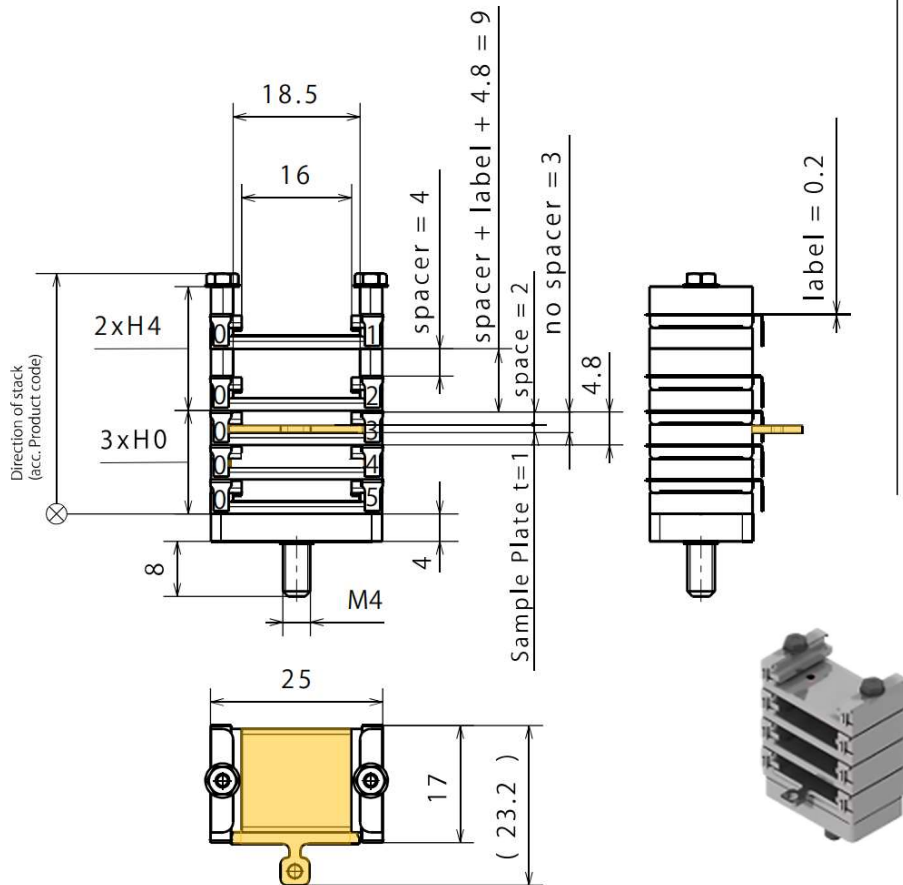

Additional Options

RECOMSTACK on straight adapter
inverse mounted
RECOMSTACK(10H04S)H

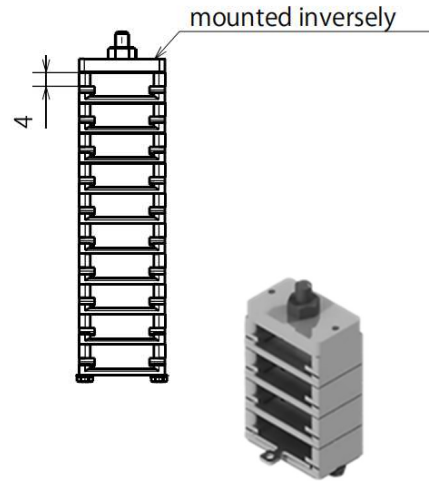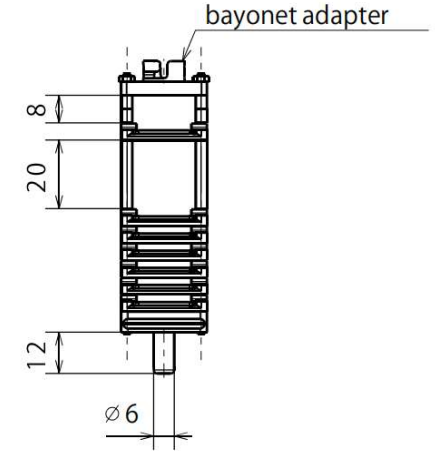RECOMSTACK on orthogonal adapter labeled
RECOMSTACKO(03H00S)LRECOMSTACK on bayonet adapter
RECOMSTACKT(05H00S01H20S01H08S)RECOMSTACK on adapter for straight access
RECOMSTACKP(03H02S)

Material: fully UHV compatible materials		nominal dimension	over up to	1	6	30	100	300	1000
Stack of receptacles for SHOM sample plates RECOMSTACK				6	30	100	300	1000	2000
		tolerance ±		0.05	0.1	0.3	0.5	0.8	1.2
		Scale		Drawn		Brunner			
		1:1		Date		10.06.2015			
changed				16.08.23 DC					
Ferrovac CH-8050 Zurich		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERROVAC. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT OUR PERMISSION IS PROHIBITED.		Rev.	F	RECOMSTACK A3 sheet 1/1			